

LUGGED SERIES - 12VDC 1A



TIGER PART: TP1015

Features:

- Supplied with fixed AC mains cable (Bare end / UK/ Euro options)
- Universal 100-240vac input voltage
- Class II design
- Level VI efficiency
- Approved to latest EN62368-1 safety standard



The Tiger Power range of lugged power supplies feature a fixed AC cable which helps prevent accidental disconnection from the mains supply. The AC cable can be supplied either bare ended or fitted with a UK or Euro plug. The screw holes which are integral to the plastic enclosure enable the power supply to be fixed down. Approved to latest safety and efficiency standards, these power supplies are suitable for a wide range of applications.

| | |
|-------------------------------|-----------------------------|
| Part number (Bare end cable): | TP1015-BE |
| Part number (UK cable): | TP1015 |
| Part number (European cable): | TP1015-E |
| Input voltage: | 100-240vac (90-264vac max.) |
| Input frequency: | 47 - 63Hz |
| Output voltage: | 12vdc |
| Current: | 1A |
| Power : | 12 Watts |
| Protection: | Short Circuit, Over voltage |
| Dimensions: | 95 x 43 x 30mm |
| Weight: | 180g |
| AC cord length: | 1.5 metres |
| DC cord length: | 1.5 metres |
| DC connector: | 2.1 x 5.5 x 12mm (Female) |
| Polarity: | +ve (positive) centre |
| Efficiency: | 83% |
| Input current RMS Max.: | 0.5A |
| Inrush Current at 230vac: | 40A |
| Leakage current: | <0.25mA |
| Safety approval: | EN62368-1 |
| M.T.B.F: | 50,000 hours |
| Operating temperature: | 0°C to + 40°C |


TIGER POWER PRODUCTS – QUALITY & RELIABILITY

This specification is not for general release or circulation. Tiger Power reserves the right to make changes to spec. or product without notice or liability.

LUGGED SERIES - 12VDC 1A



TIGER PART: TP1015

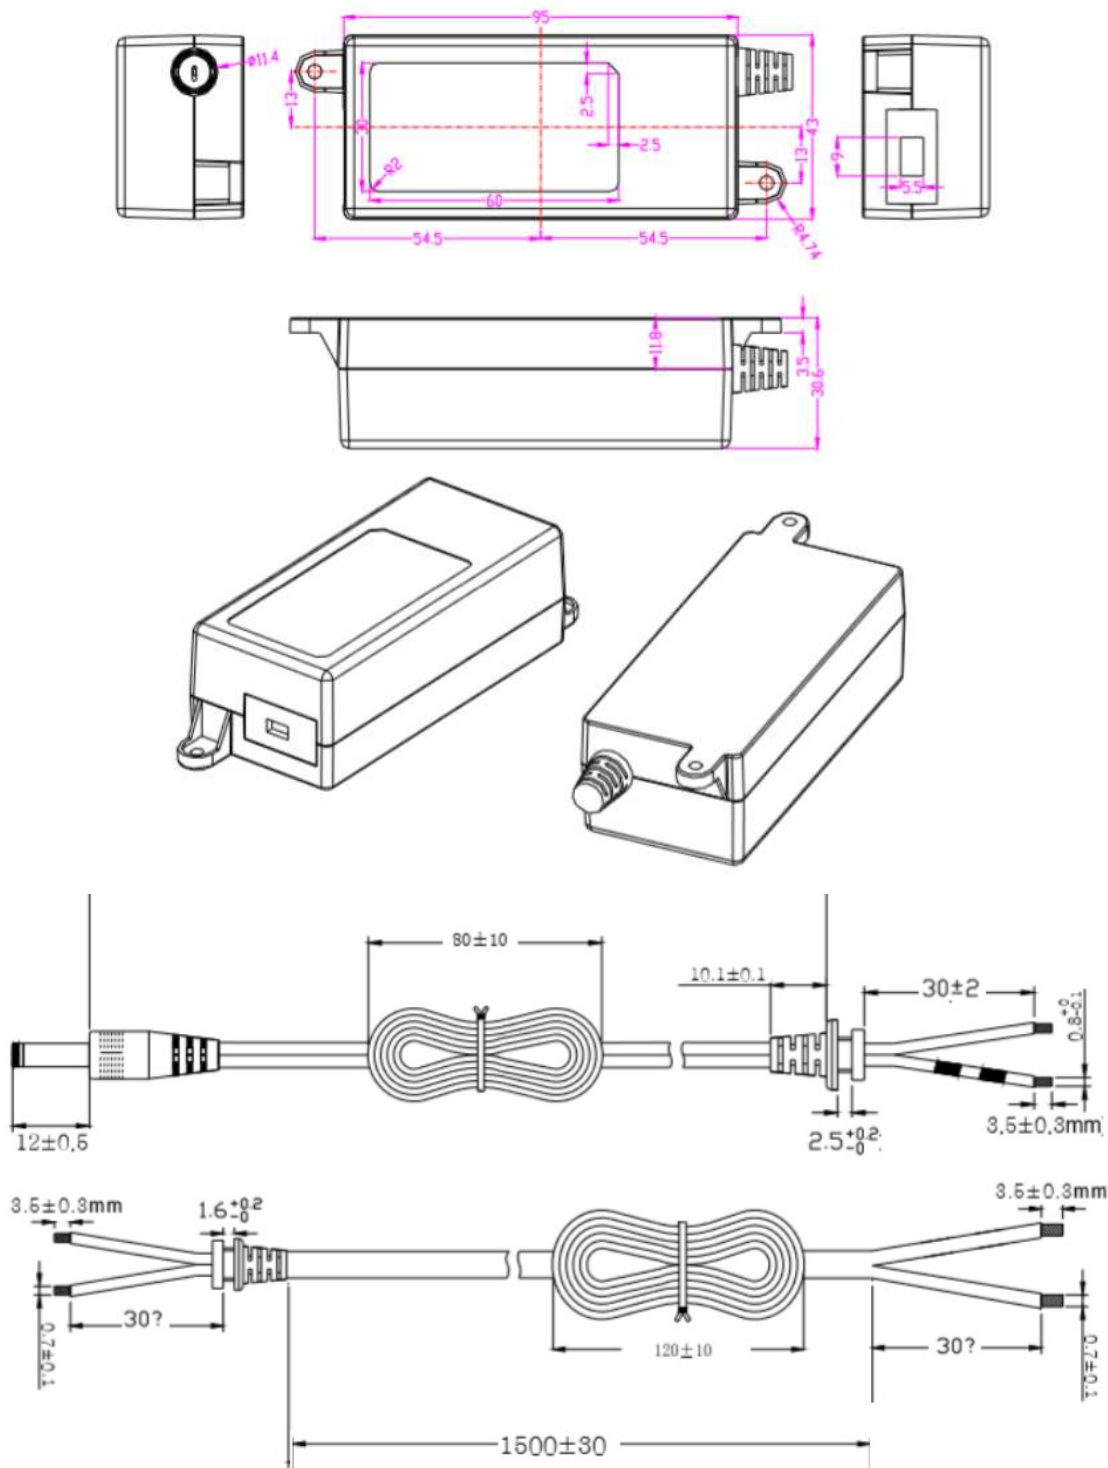

This specification is not for general release or circulation. Tiger Power reserves the right to make changes to spec. or product without notice or liability.

TIGER POWER PRODUCTS – QUALITY & RELIABILITY